



TECHNICAL SPECIFICATIONS					
VOLTS		240			
AMPS		8			
WATTS		1900			
HEATER	HIGH	1900 watts			
	LOW	900 watts			
NO HEATER		35 watts			
	QUANTITY	LED			
LAMPS	WATTS				
	TOTAL WATTS	15 watts			
ROTOR MOTOR		1 at 4 watts			
HEIGHT, WIDTH, DEPTH		23 1/2 x 58 5/8 x 6 3/4			
GLASS VIEWING OPENING		11 7/8 x 55 1/4"			
SURROUND SIZE		15 3/4" x 59 1/8"			
SHIPPING SIZE		25 1/2 x 69 3/4 x 9 3/4"			
SHIPPING WEIGHT		124 lbs			
UNIT					
GLASS FRONT		Included			
PLUG LOCATION		Left Side			
CORD LENGTH		76"			
APPROX. HEATING AREA		400 sq ft			






SERIES BUILT IN	MODEL BI-60-SLIM	c ⊕ ®	REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	

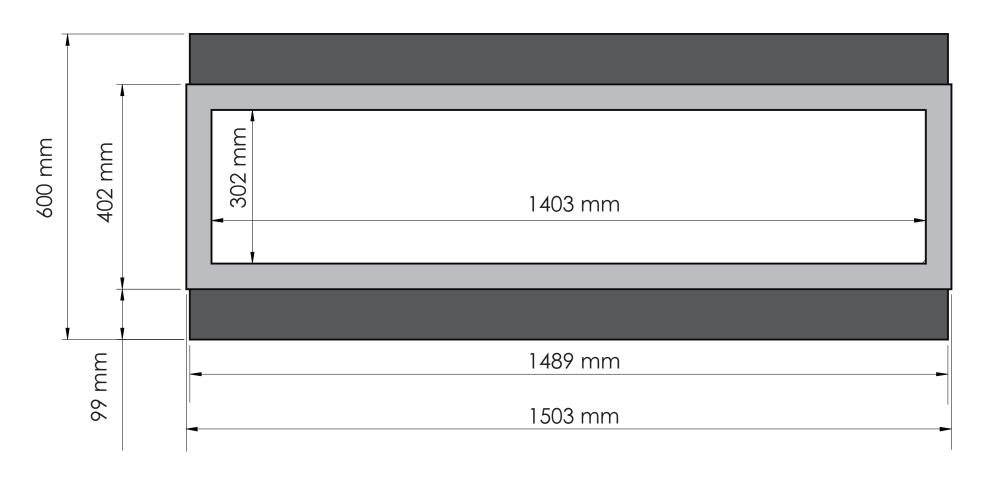



TECHNICAL SPECIFICATIONS				
VOLTS		240		
AMPS		8		
WATTS		1900		
HEATER	HIGH	1900 watts		
	LOW	900 watts		
NO HEATER		35 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	15 watts		
ROTOR MOTOR		1 at 4 watts		
HEIGHT, WIDTH, DEPTH		60 x 148.9 x 17.2 cm		
GLASS VIEWING OPENING		30.2 x 140.3 cm		
SURROUND SIZE		40.2 x 150.3 cm		
SHIPPING SIZE		64 x 176.7 x 24.8 cm		
SHIPPING WEIGHT		56 kg		
UNIT GLASS FRONT				
		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		193 cm		
APPROX. HEATING AREA		37 sqm		

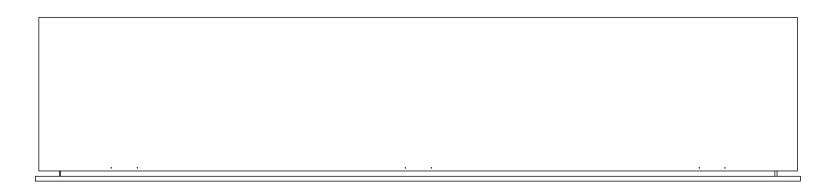



SERIES BUILT IN	MODEL BI-60-SLIM	c∰ _{US}	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	