



TECHNICAL SPECIFICATIONS				
VOLTS		240		
AMPS		8		
WATTS		1900		
	HIGH	1900 watts		
HEATER	LOW	900 watts		
NO HEATER		35 watts		
	QUANTITY	LED		
LAMPS	WATTS			
To	OTAL WATTS	15 watts		
ROTOR MOTOR		1 at 4 watts		
HEIGHT, WIDTH, DEPTH		23 1/2 x 72 1/4 x 6 3/4		
GLASS VIEWING OPENING		12 x 68 3/4		
SURROUND SIZE		15 3/4 x 72 3/4		
SHIPPING SIZE		25 1/4 x 83 1/4 x 9 3/4		
SHIPPING WEIGHT		150 lbs		
UNIT				
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		76"		
APPROX. HEATING AREA		400 sq ft		



SERIES BUILT IN	MODEL BI-72-SLIM	©®° _{US}	REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	

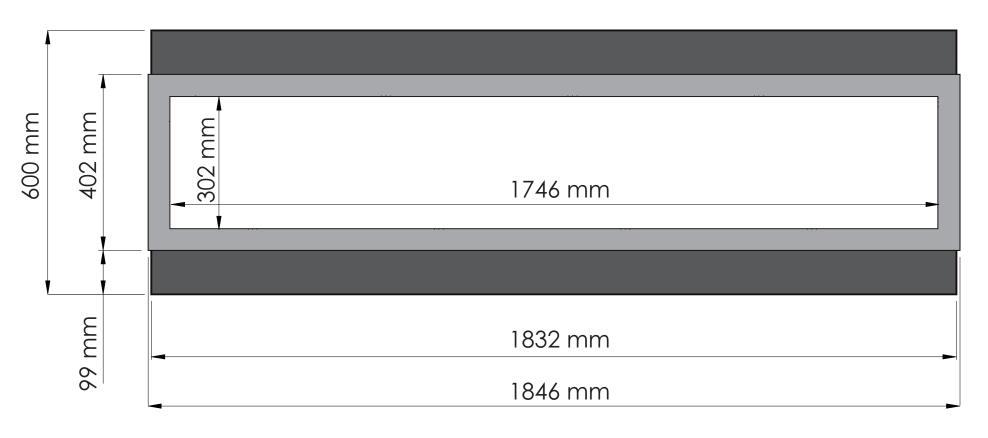

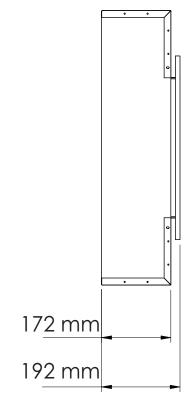

TECH	TECHNICAL SPECIFICATIONS				
VOLTS		240			
AMPS		8			
WATTS		1900			
HEATER	HIGH	1900 watts			
	LOW	900 watts			
NO HEATER		35 watts			
	QUANTITY	LED			
LAMPS	WATTS				
	TOTAL WATTS	15 watts			
ROTOR MOTOR		1 at 4 watts			
HEIGHT, WIDTH, DEPTH		60 x 183.2 x 17.2 cm			
GLASS VIEWING OPENING		30.2 x 174.6 cm			
SURROUND SIZE		40.2 x 184.6 cm			
SHIPPING SIZE		64 x 211 x 24.8 cm			
SHIPPING WEIGHT		68 kg			
UNIT					
GLASS FRONT		Included			
PLUG LOCATION		Left Side			
CORD LENGTH		193 cm			
APPROX. HEATING AREA		37 sqm			



SERIES BUILT IN	MODEL BI-72-SLIM	© US	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	